



Network card Replacement

In this guide I'll show you how to replace the network card.

Written By: Robin Koch



INTRODUCTION



Want to have a newer/faster network card? Follow this guide, it will show you how to replace it.

Step 1 — Remove battery




⚠ Be sure to remove the battery to prevent any electrical shortage.

Step 2 — Remove the backpanel

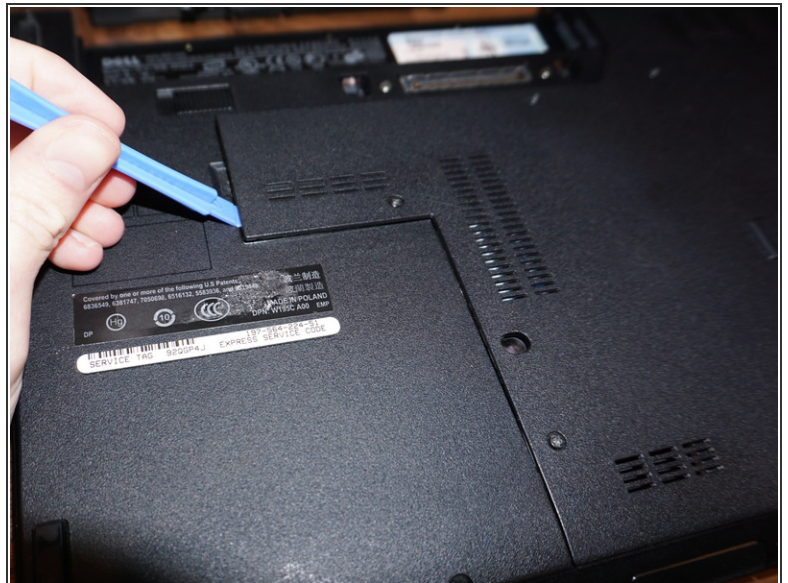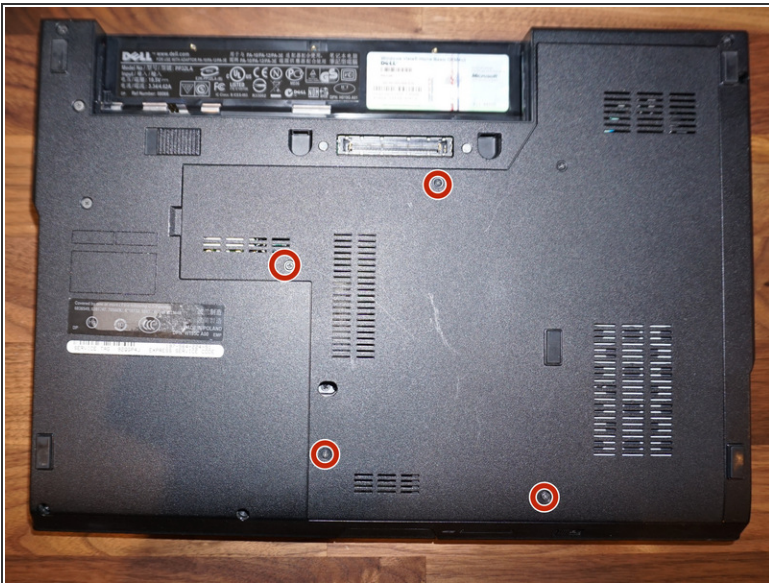

- Loosen all four screws and remove the backpanel.
- Remove the backpanel with a spudger. Start out as in the second photo to prevent the plastic from breaking. Work your way around the panel to remove it.

Step 3 — Remove the antenna wires

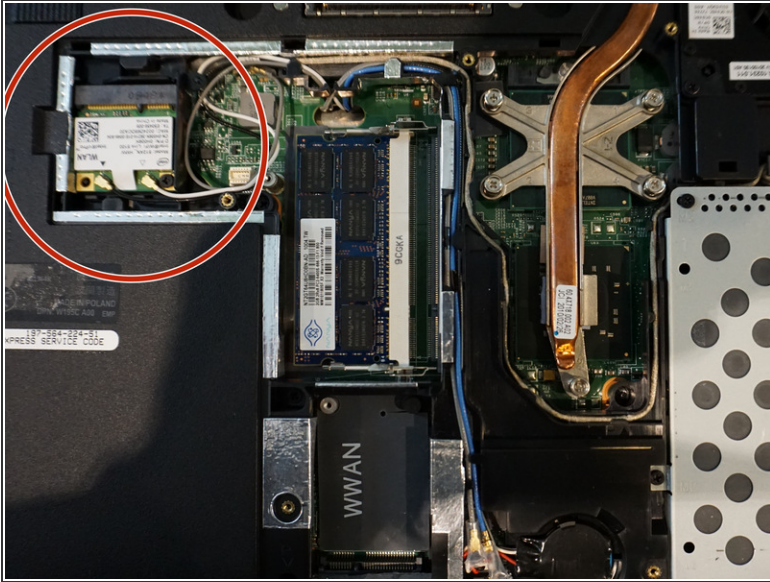

- In the red circle is the network card
- Remove the two wires (inside the green circle) BE AWARE: the wires are very fragile and need to be removed with care

Step 4 — Remove the network card



- Place the spudger as shown in the photo. The network card will pop up. After that you can remove it and replace it with another one

⚠ The wires are very fragile, be aware!

To reassemble your device, follow these instructions in reverse order. Be sure to connect the wires the same as in step 3.

This document was last generated on 2017-08-09 03:44:24 PM.